

PIKCELL GROUP



PiK High Quality PV Modules Series

Monocrystalline PV Module - PiK320M(60)

Best in class quality PiKCELL Group production line is fully automated and include multiple quality checks throughout the production process including Cell Testing, 100% Visual Mirror Inspection, EL Testing and PV Sun Simulator Testing



Made in Republic of North Macedonia



PID free



Module efficiency up to 21.7%



Output power tolerances




Supremely low degradation



Excellent low light performance

25-YEAR LINEAR WARRANTY

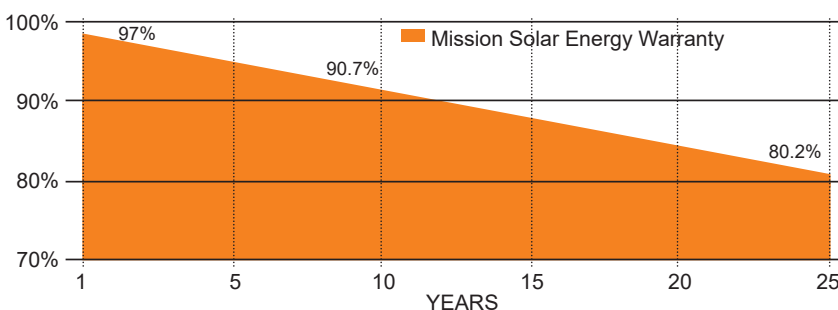


CERTIFICATES



Electrical Specifications @ STC (AM, 5, 1,000W/m², 25°C):


I-V Curve at Various Irradiation Levels and Various Cell Temperatures

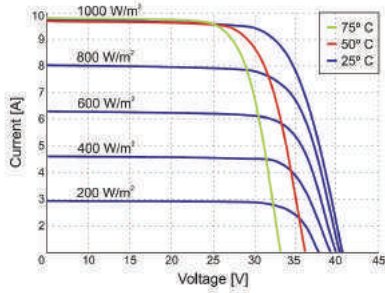

Module Type		PiK320M(60)
Nominal Power	P _{mpp} (W)	320
Short Circuit Current	I _{sc} (A)	10.0
Open Circuit Voltage	V _{oc} (V)	44.93
MPP Current	I _{mpp} (A)	9.40
MPP Voltage	V _{mpp} (V)	34.15
Solar Cell Efficiency	η _c (%)	22.0
Module Efficiency	η _m % (%)	21.7
Power Output Tolerance		± 3%
Maximum Reverse Current		18 A
Maximum System Voltage		1,000 V (Application Class A)

Additional power classes available upon request. | Power measurement tolerance: ~3%.


Effective Efficiency

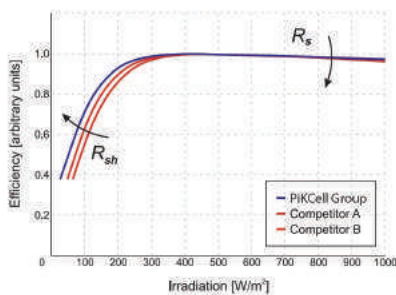

Thermal Specifications

Current temperature Coefficient α	+ 0,046 %/°C
Voltage Temperature Coefficient β	- 0.30 %/°C
Power Temperature Coefficient γ	-0.39 %/°C
NOCT	44 °C
Temperature Range	-40 °C to + 85 °C

Dimensions

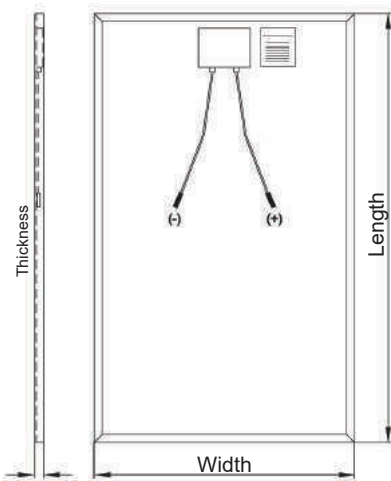

Length 1640 mm
Width 990 mm
Thickness 40 mm

Mechanical Specifications

Length x Width x Thickness	1640 mm x 990 mm x 40 mm
Weight	17.2 kg
Solar Cells	60 poly c-Si in series / 156 mm x 156 mm (6+")
Junction Box / Connectors	Five bypass diodes / MC4 compatible / IP 67
Frame	Anodized AL with drainage holes / rigid anchored corners
Glass	3.2 mm glass with anti-reflective coating / tempered / high –transparency / low-iron content
Packaging	26 modules per pallet / stackable 2 pallets high
Certified Nominal Load (snow/wind)	5,400 Pa / 2,400 Pa
Impact resistance	Hailstone / φ 25 mm / 83 km/h (51 mph)

All unspecified tolerances are ± 3%. Unspecified product properties remain under full discretion of PiKCell Group.

PiKCELL Group

Address:
Pero Nakov bb, 1000 Skopje
Republic of North Macedonia

tel. +389 2 2446 999
email: contact@pikcellgroup.mk
www.pikcellgroup.mk

Dealer information

www.pikcellgroup.mk

Additional terms & conditions apply. Please see **Standard limited Warranty and General Terms and Conditions**. © PiKCell Group July 2018. All rights reserved. All information presented in this document is subject to change without prior and serve for informative purposes only.