

PIK-M10-M-72-MH-(580-600)W

16BB HALF-CELL N-Type TOPCon Bifacial Double Glass Monocrystalline PV Module



580-600W

POWER RANGE

23.22%

MAXIMUM EFFICIENCY

0.40%

YEARLY DEGRADATION



12 YEARS PRODUCT WARRANTY



**30 YEARS OUTPUT
GUARANTEE**




IEC 61215/IEC 61730

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

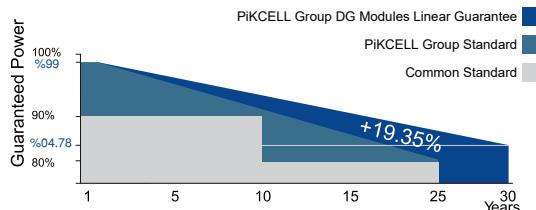

*Please check the valid version of Limited Product Warranty which is officially released by PIKCELL Group

*As there are different certification requirements in different markets, please contact your local sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

Key Features



Excellent Cells Efficiency

SMBB technology reduce the distance between busbars and finger grid line which is benefit to power increase.



Anti PID

Ensured PID resistance through the quality control of cell manufacturing process and raw materials.



Reaction to Fire Class 1

In conformity with standard UNI 9177:1987, reaction to fire class 1.



Bifacial Technology

Up to 25% additional power gain from back side depending on albedo.



Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and early morning.



Adapt To Harsh Outdoor Environment



Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity environment.



Excellent Quality Management System

Warranted reliability and stringent quality assurances well beyond certified requirements.


DIMENSIONS OF PV MODULE(mm)

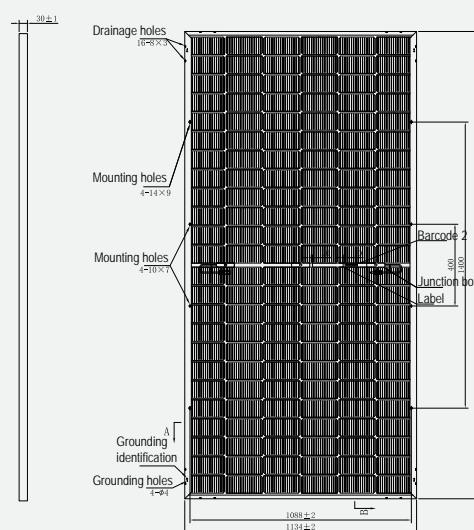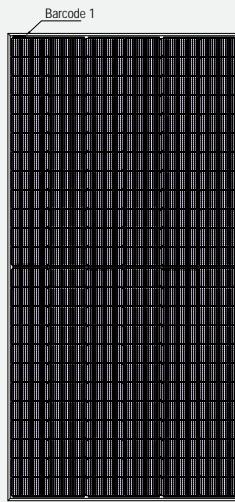


Front View

Back View

I-V CURVES OF PV MODULE(580W)

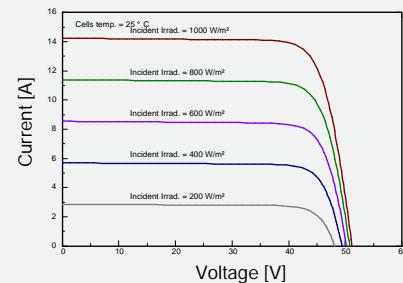

P-V CURVES OF PV MODULE(580W)

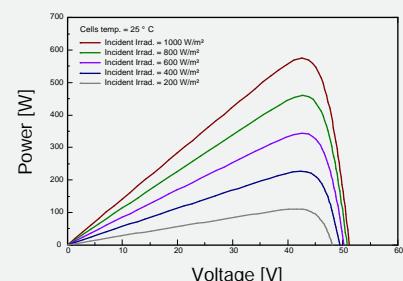

*Remark: customized frame color and cable length available upon request

ELECTRICAL CHARACTERISTICS | STC*

MECHANICAL DATA

Nominal Power Watt Pmax(W)*	580	585	590	595	600	Solar cells	N-type Monocrystalline
Maximum Power Voltage Vmp(V)	42.63	42.78	42.94	43.10	43.25	Cells orientation	144 (6x24)
Maximum Power Current Imp(A)	13.61	13.70	13.76	13.83	13.89	Module dimension	2279x1134x30 mm (With Frame)
Open Circuit Voltage Voc(V)	51.29	51.48	51.67	51.86	52.05	Weight	31.5±1.0 kg
Short Circuit Current Isc(A)	14.45	14.50	14.55	14.61	14.66	Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Module Efficiency (%)	22.44	22.64	22.83	23.02	23.22	Junction box	IP 68, 3 diodes
						Cables	4 mm², 350 mm (With Connectors)
						Connectors*	MC4-compatible

*The data above is for reference only and the actual data is in accordance with the practical testing

*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25±2°C, AM 1.5

*Measuring uncertainty: ±3%, all the electrical characteristics such as Power, Im, Vm and FF are within ±3% tolerance.

*Please refer to regional datasheet for specified connector

ELECTRICAL CHARACTERISTICS | NMOT*

TEMPERATURE RATINGS

WORKING CONDITIONS

Maximum Power Pmax(Wp)	440.30	443.70	447.40	451.30	454.90	NMOT	44°C ±2°C	Maximum system voltage	1500 V DC
Maximum Power Voltage Vmp(V)	39.56	39.70	39.85	39.99	40.13	Temperature coefficient of Pmax	(-0.30±0.03)%/°C	Operating temperature	-40°C~+85°C
Maximum Power Current Imp(A)	11.13	11.18	11.23	11.28	11.33	Temperature coefficient of Voc	-0.25%/°C	Maximum series fuse	30 A
Open Circuit Voltage Voc(V)	47.70	47.88	48.05	48.23	48.41	Temperature coefficient of Isc	0.046%/°C	Front Side Maximum Static Loading	Up to 5400Pa
Short Circuit Current Isc(A)	11.84	11.89	11.93	11.98	12.02	Refer.Bifacial Factor	(80±10)%	Rear Side Maximum Static Loading	Up to 2400Pa

*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

*Remark: Do not connect Fuse in Combiner Box with two or more strings in parallel connection

ELECTRICAL CHARACTERISTICS WITH 25% REAR SIDE POWER GAIN*

PACKAGING CONFIGURATION *

Front power Pmax/W	580	585	590	595	600	Piece/Box	36
Total power Pmax/W	725	731	738	734	750	Piece/Container(40'HQ)	720
Vmp/V(Total)	42.63	42.78	42.94	43.10	43.25		
Imp/A(Total)	17.01	17.13	17.20	17.29	17.36		
Voc/V(Total)	51.29	51.48	51.67	51.86	52.05		
Isc/A(Total)	18.06	18.13	18.19	18.26	18.33		

*Customized packaging is available upon request.

*Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.

They only serve for comparison among different module types.

*Caution: Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

*Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.